




QV7

MECHANICAL FASTENING FOR TERRACOTTA PANELS

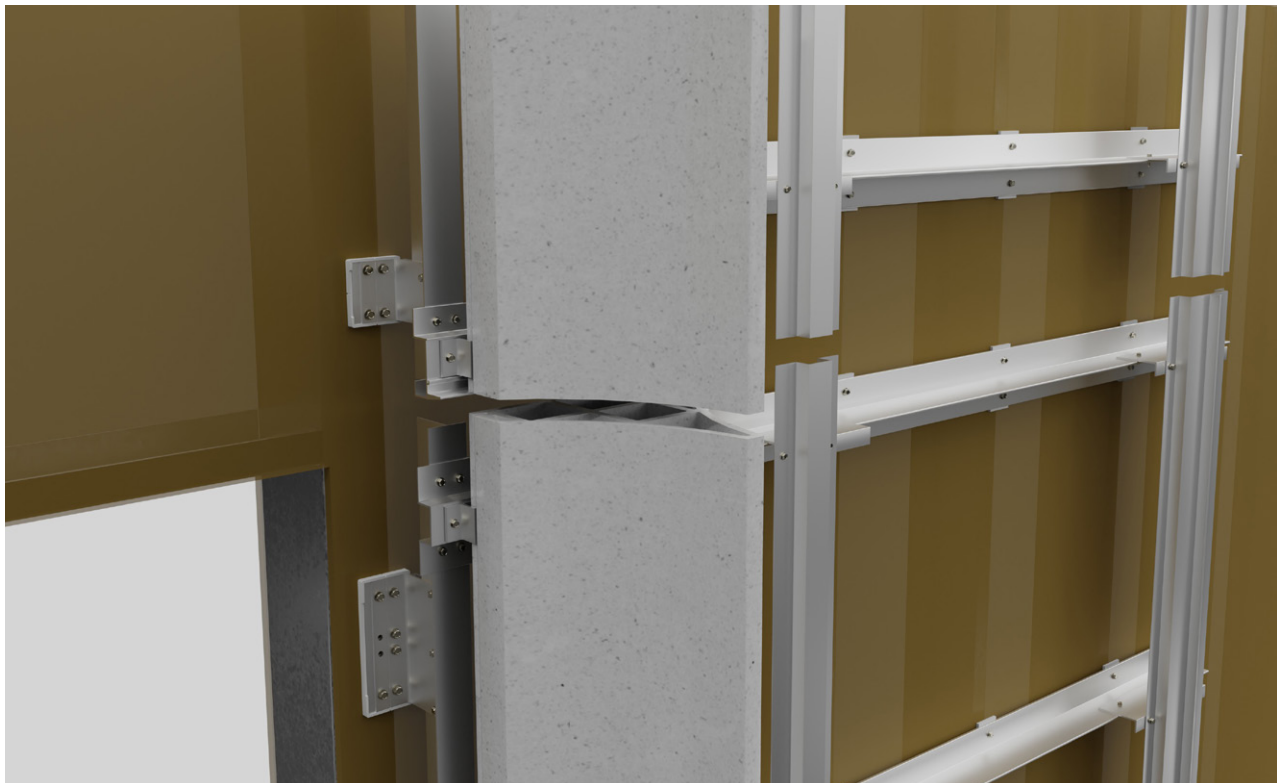

- + + **VERSATILE SOLUTION FOR ATTACHMENT OF TERRACOTTA** +
- + **PANELS USING CLIPS** +
- + + **COMPATIBLE WITH MOST CLADDING MATERIALS** +
- + + **BUILT-IN ADJUSTABILITY** +
- + + **THERMALLY BROKEN** +
- + + **A1 NON-COMBUSTIBLE** +
- + + **100% RECYCLABLE** +



QV7 OVERVIEW

The QV7 system supports terracotta panels with a thickness of > 1". The system can be adapted for use with most terracotta manufacturers producing flat and 3D units. QV7 system can be used on a stud wall, as well as concrete, CMU, and plywood substrates.

The QV7 system can be configured for horizontal and vertical terracotta panels' horizontal and vertical orientation. Depending on the project-specific configuration, the terracotta panels are secured with clips to either horizontal or vertical profiles.

CLADDINGS

- + Terracotta panels with thickness >1", produced by any manufacturer



COMPONENTS

System components are manufactured from the highest quality materials to rigorous quality control standards, ensuring long-term reliability and service life.

TYPE	MATERIAL	NOTES
Vertical and horizontal profiles	Extruded aluminum, alloy AW 6063, temper T66 or T6; Aluminum sheet alloy AW 5754 H22	Unpainted, RAL painted, anodized 12 µm (or more upon request); Cavity depth, check the latest company delivery program;
Clips	Extruded aluminum, alloy AW 6063, temper T66	Unpainted, RAL painted, anodized 12 µm (or more upon request)
Gaskets	Silicone, soft pvc	Black, typ.
QVB Wall brackets	Extruded aluminum, alloy AW 6063, temper T6	Built-in in/out adjustability of 3/4"; Unpainted, typ.
Accessories	Extruded aluminum, alloy AW 6063, temper T66 or T6; Aluminum sheet alloy AW 5754 H22	Unpainted, RAL painted, anodized 12 µm (or more upon request)
QVB thermo-pads	Polypropylene	
Fasteners	Stainless steel or with corrosion resistant coating	

THERMAL PERFORMANCE

The use of thermo-pads reduces thermal bridging. The strength of the extruded materials allows for fewer wall brackets and screw penetrations to the wall compared to other attachment methods.

A given system's thermal performance varies significantly depending on the wall build-up, exterior insulation depth, cladding materials, and clip spacing. Historical thermal modeling has revealed a thermal efficiency of 70%-90%. Project-specific thermal modeling is available upon request.

SYSTEMS

	ACM	HPL	Fiber cement	GFRC	Stone	Ceramic/ Porcelain	Metal Panel	Glass	Flat and 3D terracotta
QV1 Flat panels exposed mechanical fastening	+	+	+	+	+	+	+	-	-
QV2 Flat panels concealed adhesive on-site structural fastening	+	+	+	+	+	+	+	-	-
QV3 AGROB BUCHTAL KeraTwin® K20 terracotta	-	-	-	-	-	-	-	-	+
QV6 Advanced concealed mechanical fastening, using undercut technology	+	+	+	+	+	+	+	-	+
QV7 3D panels, architectural terracotta mechanical fastening	-	-	-	-	-	-	-	-	+
QV9 Metal panels mechanical and structural fastening	+	-	-	-	-	-	+	-	-
AIO Bespoke, slab-to-slab panel fixing	+	+	+	+	+	+	+	+	+
Q-CLOUD Glass panels off-site structural bonding	-	-	-	-	-	-	-	+	-

3D models of all systems on [q-vent.com/facades](https://www.q-vent.com/facades)

DELIVERY OPTIONS

The systems are manufactured to individual project specifications, as fully engineered solutions OR can be purchased as components only from existing stock located in Sofia, EU and New Jersey, US warehouse.

Additional services:

- Shop Drawings
- Structural Calculations
- Installation Drawings
- Thermal Analysis
- Bespoke System Development

QUALITY AND DURABILITY

System components are manufactured from the highest quality materials to rigorous quality control standards, ensuring long-term reliability and service life. System components are designed and manufactured in the EU, conforming to CE mark certification.

Q-VENT GUARANTEE

- 10-year warranty for components
- Project specific system warranty is available, only in case Q-Vent provides or approves structural calculations, shop drawings, and installation plans.

Q-VENT reserves the right to make technical changes to this document. Information contained in this documents is non-binding. Before using Q-VENT products, all specifications and calculation must be checked by a qualified engineer and must be in compliance with local regulations.