




# QV6

## CONCEALED FASTENING FOR 3D AND FLAT PANELS

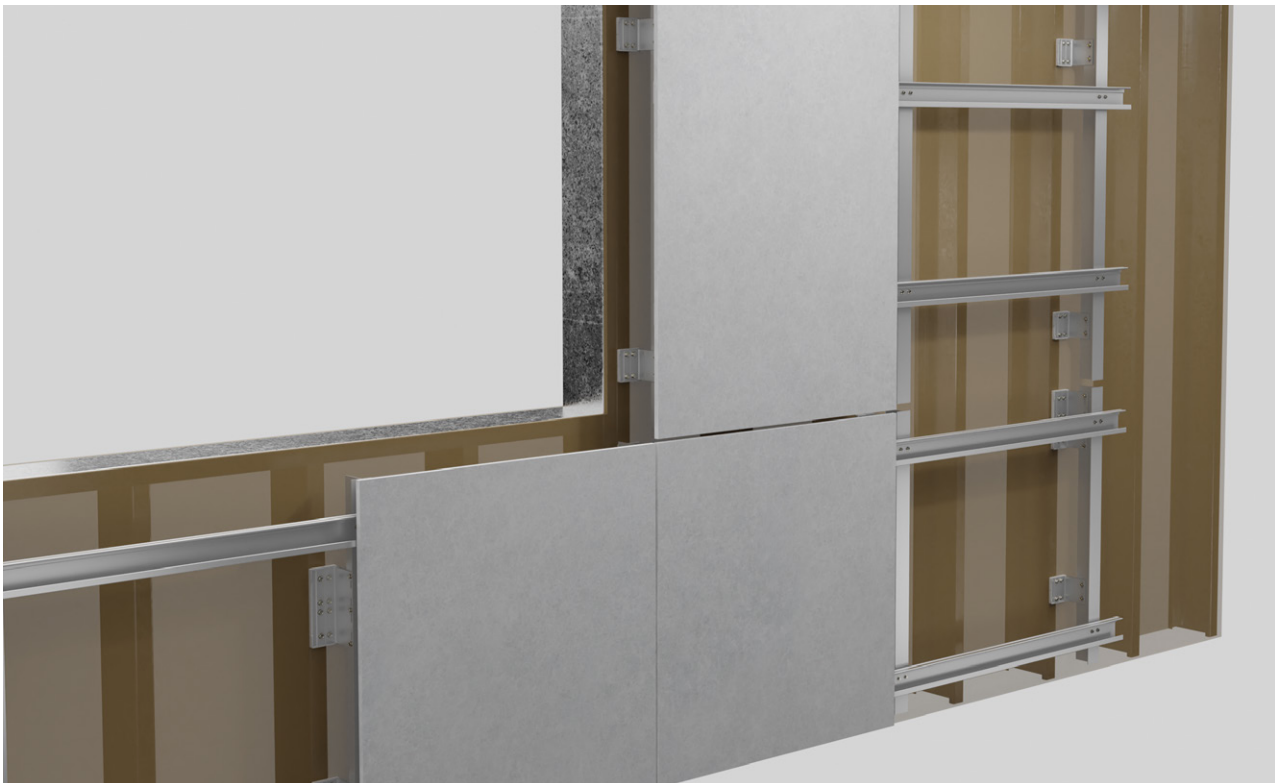

- + + **ADVANCED SYSTEM, USING ANCHOR TECHNOLOGY** +
- + + **COMPATIBLE WITH MOST CLADDING MATERIALS** +
- + + **BUILT-IN ADJUSTABILITY** +
- + + **THERMALLY BROKEN** +
- + + **A1 NON-COMBUSTIBLE** +
- + + **100% RECYCLABLE** +



## QV6 OVERVIEW

The QV6 system is designed for hidden support of various cladding materials, using undercut anchor technology. The system can be used on a stud wall and concrete, CMU, and plywood substrates. The QV6 system can be used with many types of undercut anchors available on the market.

- The undercut anchors are placed in the back of the cladding panels, and hangers are secured to the undercut anchors. The hangers have built-in bolts allowing fine vertical adjustment of the panels.
- The cladding panels are suspended with the hangers engaged into the horizontal system rails.
- The horizontal system rails are attached to the vertical T and L profiles via fasteners, which are attached to the QVB wall brackets via a series of fixed and flexible connections.
- The brackets come with a thermal insulator to reduce the thermal bridging and prevent galvanic corrosion.

## CLADDINGS FROM 5/16\* UP TO 2\*

- + HPL
- + Fiber-cement
- + GFRC
- + Stone
- + Ceramic

Scan to explore the 3D model of the system



## COMPONENTS

System components are manufactured from the highest quality materials to rigorous quality control standards, ensuring long-term reliability and service life.

TYPE	MATERIAL	NOTES
Horizontal system rails	Extruded aluminum, alloy AW 6063, temper T66	Unpainted, RAL painted, anodized 12 µm (or more upon request)
Hangers	Extruded aluminum, alloy AW 6063, temper T66	RAL painted, anodized 12 µm (or more upon request)
Pads (between hangers and panels)	Silicone, EPDM, Neoprene	Thickness 0.04" and 0.08"
Vertical profiles	Extruded aluminum, alloy AW 6063, temper T66	Unpainted, RAL painted, anodized 12 µm (or more upon request)
QVB Wall brackets	Extruded aluminum, alloy AW 6063, temper T6	Cavity depth from 2" to 8 5/8", Built-in in/out adjustability of 3/4"; Unpainted, typ.
Accessories	Extruded aluminum, alloy AW 6063, temper T66 or T6; Aluminum sheet alloy AW 5754 H22	Unpainted, RAL painted, anodized 12 µm (or more upon request)
QVB thermo-pads	Polypropylene	
Undercut anchors	Stainless steel	
Fasteners	Stainless steel or with corrosion resistant coating	

## THERMAL PERFORMANCE

The use of thermo-pads reduces thermal bridging. The strength of the extruded materials allows for fewer wall brackets and screw penetrations to the wall compared to other attachment methods.

A given system's thermal performance varies significantly depending on the wall build-up, exterior insulation depth, cladding materials, and clip spacing. Historical thermal modeling has revealed a thermal efficiency of 70%-90%. Project-specific thermal modeling is available upon request.

# SYSTEMS

	ACM	HPL	Fiber cement	GFRC	Stone	Ceramic/ Porcelain	Metal Panel	Glass	Flat and 3D terracotta
<b>QV1</b> Flat panels exposed mechanical fastening	+	+	+	+	+	+	+	-	-
<b>QV2</b> Flat panels concealed adhesive on-site structural fastening	+	+	+	+	+	+	+	-	-
<b>QV3</b> AGROB BUCHTAL KeraTwin® K20 terracotta	-	-	-	-	-	-	-	-	+
<b>QV6</b> Advanced concealed mechanical fastening, using undercut technology	+	+	+	+	+	+	+	-	+
<b>QV7</b> 3D panels, architectural terracotta mechanical fastening	-	-	-	-	-	-	-	-	+
<b>QV9</b> Metal panels mechanical and structural fastening	+	-	-	-	-	-	+	-	-
<b>AIO</b> Bespoke, slab-to-slab panel fixing	+	+	+	+	+	+	+	+	+
<b>Q-CLOUD</b> Glass panels off-site structural bonding	-	-	-	-	-	-	-	+	-

3D models of all systems on [q-vent.com/facades](https://www.q-vent.com/facades)

## DELIVERY OPTIONS

The systems are manufactured to individual project specifications, as fully engineered solutions OR can be purchased as components only from existing stock located in Sofia, EU and New Jersey, US warehouse.

Additional services:

- Shop Drawings
- Structural Calculations
- Installation Drawings
- Thermal Analysis
- Bespoke System Development

## QUALITY AND DURABILITY

System components are manufactured from the highest quality materials to rigorous quality control standards, ensuring long-term reliability and service life. System components are designed and manufactured in the EU, conforming to CE mark certification.

## Q-VENT GUARANTEE

- 10-year warranty for components
- Project specific system warranty is available, only in case Q-Vent provides or approves structural calculations, shop drawings, and installation plans.

Q-VENT reserves the right to make technical changes to this document. Information contained in this documents is non-binding. Before using Q-VENT products, all specifications and calculation must be checked by a qualified engineer and must be in compliance with local regulations.